

# X-LINK SERIES

RL-XS2550-26P-E

RL-XS2550-26P-E is a lite manageable Switch independently developed by Sundray. The RL-XS2550-26P-E provides 24 10/100/1000Mbps RJ45 ports and 2 Gigabit SFPs. It supports wire-speed forwarding on all ports, which can provide you with greater network flexibility. In combination with XMG or XRT Router, it can perform VLAN configuration, static MAC address binding, port isolation, loop detection, DHCP-SNOOPING, device reboot, etc. via Sundray Cloud, and it also supports device status monitoring in Sundray Cloud. Remote management and operation and maintenance are more convenient.

The switch supports PD power supply and 220V AC power supply, which can flexibly expand the network of commercial stores and offices without the limitation of high-voltage power line layout, and meets the requirements of small and medium-sized enterprises, hotels, and commercial stores for networking and wired access.



RL-XS2550-26P-E

## 2 Technical Specifications




### Product Specifications of SUNDRAY Lite Manageable Switch

Item	Description
Model	RL-XS2550-26P-E
Dimensions (mm)	440mm×208mm×44mm
Weight	2.12 Kg
Default Ports	24*10/100/1000Base-T ports 2*SFP Ports
Management Ports	1*Console
Power	802.at POE and Local Power Supply(220V/50Hz)
MAC Address Table	8K
Switch capacity	256Gbpsbps
Package forwarding rate	48Mpps
Work temperature Operating/storage humidity	Work temperature : 0°C ~ 45°C Storage temperature: -40°C ~ 70°C Work humidity: 5% ~ 90% RH, non-condensing
EEE	Support IEEE 802.3az standard EEE energy-saving technology: When EEE is enabled, the power consumption of the port at this stage is greatly reduced, achieving energy saving.
Security feature	Support DHCP Snooping Support port protection, isolation Support CPU protection
Network management	Support management with XMG/XRT via Sundray Cloud
Safety & EMC	Meet the standards of FCC, CE: EN55022, EN61000-3-2, EN61000-3-3, EN55024, EN60950-1,RoHS

## 3 Order Information

Model	Specifications	Remarks
RL-XS2550-26P-E	The X-LINK Lite manageable Switch, support 2*SFP ports, 24 * 10/100/1000Base-T ports. Switching capacity 256Gbps, Forwarding rate 56Mpps. 802.at POE and Local Power Supply(220V/50Hz)	Essential

## Reference Topology

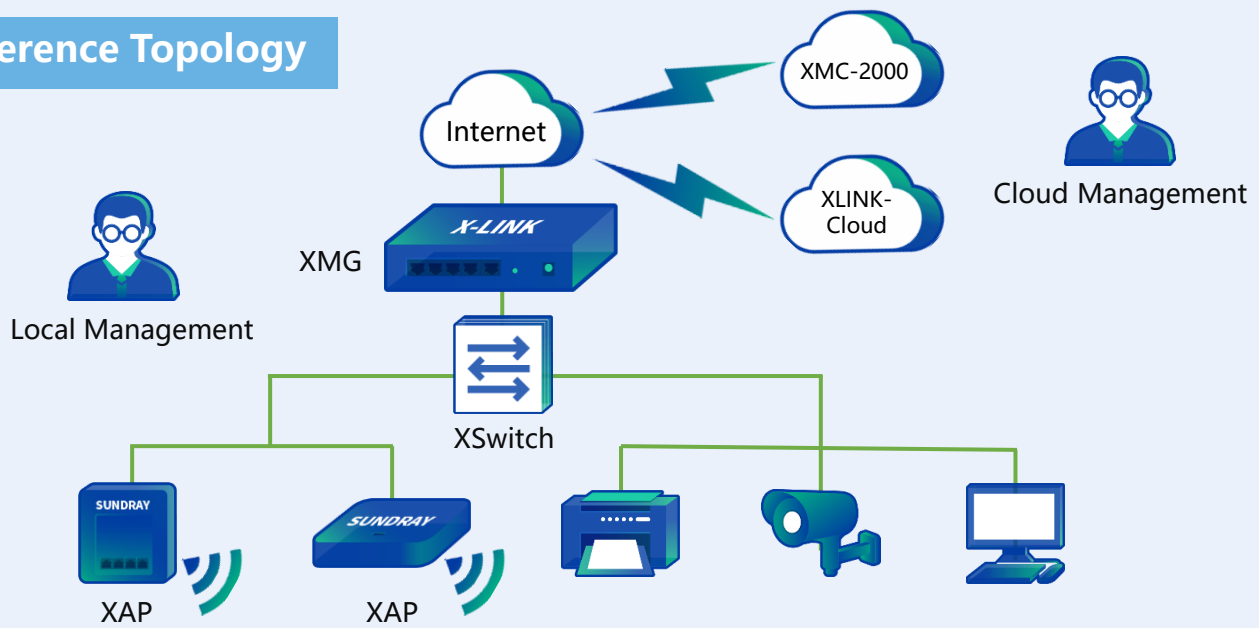

**SANGFOR**



**SUNDRAY**

### Sundray Technologies Co., Ltd.

**Add:** Building A4, Nanshan i Park, No.1001 Xueyuan Road,  
Nanshan District, Shenzhen, Guangdong Province, P. R.  
China Post | Post Code: 518055

### Service hot line:

Philippine Service Center Tel / Viber: +63 9171102171

Indonesia Service Center Tel / WhatsApp: +62 8111988110

Shen Zhen, China HQ service Center (Hotline in Chinese):

0086 - 75586953231

0086 - 75586957873

**Web:** [www.sundray.com](http://www.sundray.com)

[www.sangfor.com](http://www.sangfor.com)

**E-mail:** [sales@sundray.com](mailto:sales@sundray.com)

[tech.support@sundray.com](mailto:tech.support@sundray.com)

Document Version: 20201127-V1.0

Copyright © 2020 Shenzhen Sundray Technologies Company Ltd. All rights reserved.

Disclaimer: Sundray Technologies retains the rights of final explanation and modification of this document and this statement